

BROCHURE **XINGYUAN** V 1.0 **TRUCK TYRE**



XINGYUAN TYRE GROUP CO.,LTD

ADD: Xishui Industrial Zone, Dongying City, Shandong Province, China

Web Site: www.xingyuangroup.com

Xingyuan group, founded in 1994, is one of the largest leading tyre enterprises in China. Xingyuan Group, a diversified business enterprise, is located in Guangro County within Shandong province. Currently we have more than 6800 employees, including over 680 engineering technicians, with a total capital of RMB 13 billion yuan. Xingyuan Group is ranked 24th in the World, according to the American "Rubber and Plastics News" magazine 2014's top 75 global tyre enterprises list.




Xingyuan Group specializes in tyre design and manufacture. We have, so far, developed 18 series, 160 sizes and 200 tread patterns within our range of all steel radial truck, radial and bias off the road and car tyres. We have been granted 67 patents in many parts of the World, including Europe, North America and South Africa.

Our leading brand names include ANNAITE, HILO, AMBERSTONE, XINGYUAN and GUANGDA. ANNAITE branded tyres are supplied to over 80 countries and regions. The well known HILO brand has been awarded the trademark for ongoing development and export by the Chinese Institute of Industry and Commerce.

Recently, Xingyuan Group's production capacity of radial truck tyres reached 5.8 million units, radial OTR tyres at 200 thousand and passenger car at 12 million tyres per year. We work to our mission statement which is **"Quality is our life, and making our tyre a global world class brand"**. We have world class production and testing equipment to enable us to produce high quality product. Our tyres have passed certification by many well-known Technical Organisations and Quality Standards including DOT, ECE, REACH, CCC, GCC, SNI, BIS, ISO 9001, ISO14001 etc. Our products are sold to over 100 countries and regions, such as the Middle East, Southeast Asia, Africa, Europe, Latin America and The United States of America.

With our high quality product, competitive pricing, on-time delivery and superb after sales service we have a reputation of being a reliable, trustworthy enterprise supplying an excellent product, to both the domestic and export markets. We would like to invite you to join us with a view of developing a long term business relationship.

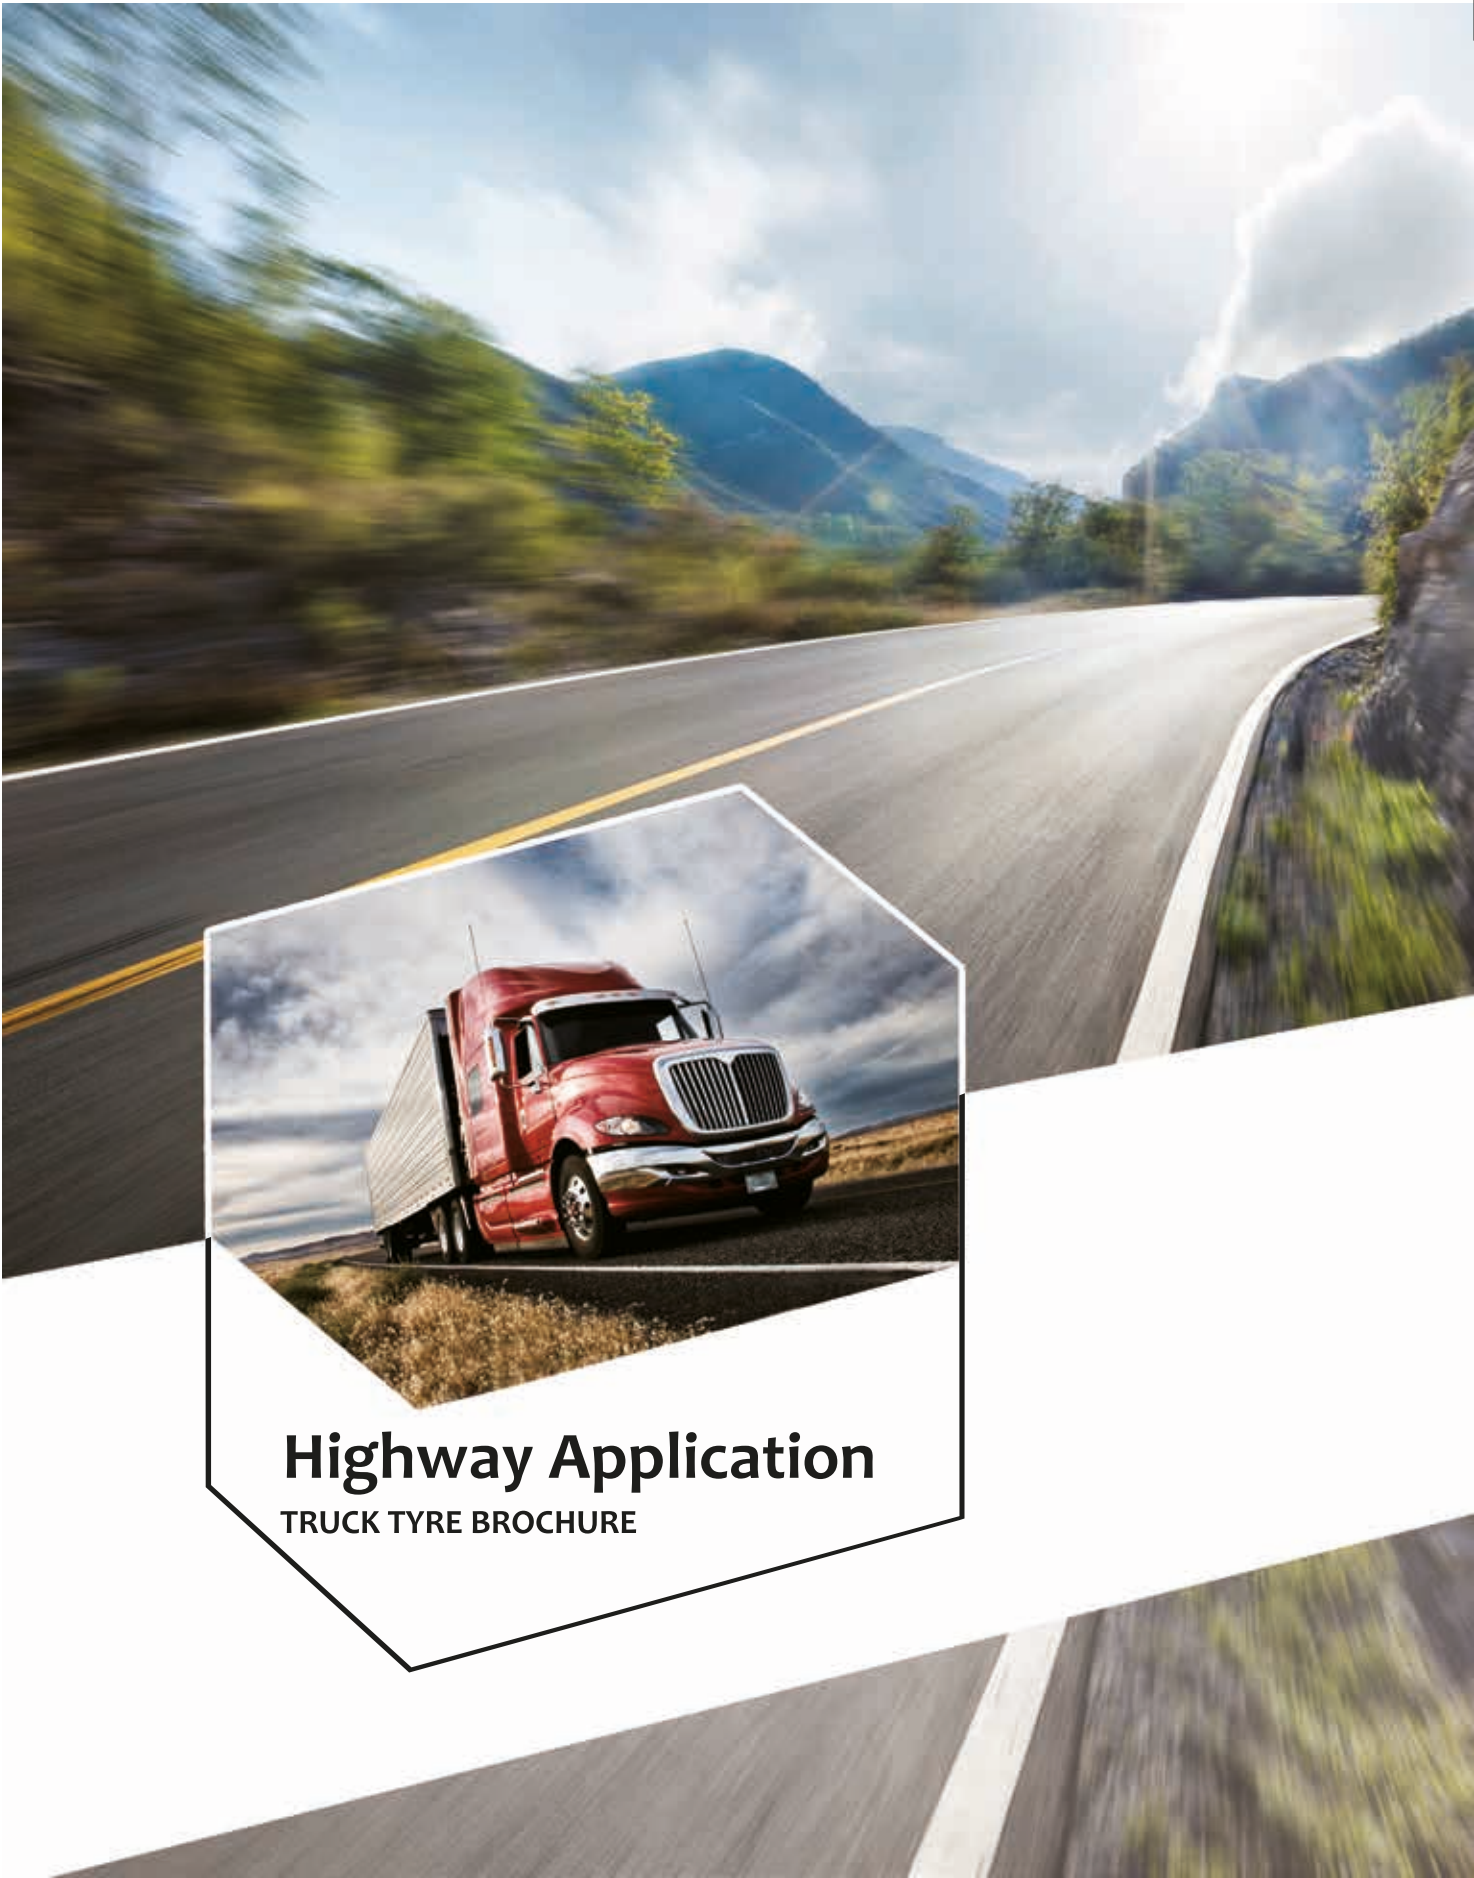

Highway Application
TRUCK TYRE BROCHURE

100

STEER / TRAILER

- Wide tread for long life and high speed running.
- Fuel efficient with lower rolling resistance.
- Reduced operational costs.
- Suitable for steer and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
9.00R20	16	144/142 L	1018	260	7.0	14.5	2800/2650	900
10.00R20	18	149/146 L	1046	278	7.5	15.0	3250/3000	930
11.00R20	18	152/149 L	1081	290	8.0	15.5	3550/3250	930
12.00R20	18	154/151 L	1117	312	8.5	15.5	3750/3450	830
11R22.5	16	146/143 M	1048	268	8.25	15.0	3000/2725	830
315/80R22.5	20	157/154 M	1075	314	9.00	15.0	4125/3750	900

366

STEER / TRAILER

- Tapered tread grooves resist stone trapping.
- Enhanced resistance to rib tear and exceptional wear life.
- Designed for city and highway service.
- Suitable for steer and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
8R22.5	14	130/128 M	936	210	6.00	13.5	1900/1800	830
9R22.5	16	139/137 M	971	232	6.75	14.5	2430/2300	930
10R22.5	16	144/142 M	1015	252	7.50	15.5	2800/2650	900
11R22.5	16	146/143 M	1051	268	8.25	16.5	3000/2725	830
11R24.5	16	149/146 L	1103	275	8.25	16.5	3250/3000	830
12R22.5	18	152/149 M	1081	298	9.00	15.0	3550/3250	930
13R22.5	18	154/151 L	1112/1122	300	9.75	13.0/16.5	3750/3450	830
205/75R17.5	14	124/122 M	749	212	6.00	12.5	1600/1500	760
215/75R17.5	14	126/124 M	761	222	6.00	12.5	1700/1600	700
	16	128/126 M	761	222	6.00	12.5	1800/1700	750
225/75R17.5	16	129/127 M	776	222	6.75	12.5	1850/1750	830
235/75R17.5	16	132/130 M	792	242	6.75	13.0	2000/1900	775
	18	143/141 J	792	242	6.75	13.0	2725/2575	875
245/70R17.5	16	136/134 M	781	249	7.50	12.5	2240/2120	850
	18	143/141 J	781	249	7.50	12.5	2725/2575	900
225/70R19.5	14	128/126 M	804	225	6.75	13.0	1800/1700	760
245/70R19.5	16	136/134 M	769	249	7.50	12.5	2240/2120	830
	18	143/141 J	769	249	7.50	12.5	2725/2575	875
265/70R19.5	16	140/138 M	866	259	7.50	14.0	2500/2360	830
	18	143/141 J	866	259	7.50	14.0	2725/2575	850
285/70R19.5	16	146/144 M	888	287	8.25	14.0	3000/2800	900
	18	150/148 J	888	287	8.25	14.0	3350/3150	900
255/70R22.5	14	138/134 M	926	245	7.50	13.0	2360/2120	760
	16	140/137 M	926	245	7.50	13.0	2500/2300	830
295/80R22.5	16	152/148 M	1038	298	9.00	16.5	3550/3150	850
	18	154/151 M	1038	298	9.00	16.5	3750/3450	900
315/70R22.5	18	154/150 M	1011	311	9.00	15.5	3750/3350	900
315/80R22.5	20	157/154 M	1071	314	9.00	16.5	4125/3750	900

101

ALL POSITION

- Wide tread for long life and high speed running.
- Fuel efficient with lower rolling resistance.
- Excellent decrease the total operation costs.
- Suitable for steer and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
6.50R16LT	12	110/105 L	747	182	5.50F	9.0	1060/925	670

311

ALL POSITION

- Fuel efficient with lower rolling resistance.
- Excellent traction and wet weather handling.
- Wider tread and complex groove angles offers enhanced tyre life with superior resistance to irregular wear.
- Suitable for all wheel positions.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 L	1081	290	8.0	16.0	3550/3250	930
12.00R20	18	154/151 L	1117	312	8.5	16.5	3750/3450	830
12R22.5	18	152/149 L	1081	298	9.00	16.0	3550/3250	930

356

ALL POSITION

- Exceptional mileage and resistance to irregular wear.
- Suitable for steer wheels and highway road application.
- Excellent resistance to rib-tearing.
- Excellent driving stability and durability.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 K	1079	290	8.0	14.8	3550/3250	930

366+

STEER / TRAILER

- Tapered tread grooves resist stone trapping.
- Enhanced resistance to rib tear and exceptional wear life.
- Designed for city and highway service.
- Suitable for steer and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
275/70R22.5	18	148/145 M	956	278	8.25	16.5	3150/2900	900

368 ALL POSITION

- Excellent resistance to irregular wear.
- Suitable for steer wheels and highway road application.
- Exceptional mileage and resistance to irregular wear.
- Excellent driving stability and durability.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 K	1079	290	8.0	14.8	3550/3250	930

396 STEER / TRAILER

- Wide base highway tyre designed for steer and trailer wheels.
- Low profile for high speed and control.
- Provides excellent resistance to irregular wear.
- Popular fitment in on-road, line haul operations.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
385/65R22.5	20	160K	1070	384	11.75	16.5	4500	900

397 DRIVE

- Deep tread for extra-long life.
- Cut resistant.
- Low profile and wide tread for super stability and durability.
- Very popular fitment for drive wheel.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
385/65R22.5	20	160K	1070	384	11.75	16.5	4500	900

706 STEER / TRAILER

- Wide tread enables long wear life and stone retention resistance.
- Deep tread for extra-long life and good wet traction.
- Combines durability in mild off road and long life on-road with good anti-sideslip.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
385/55R19.5	18	156 J	916	387	12.25	15.5	4000	900
385/55R22.5	18	158 L	992	387	12.25	15.5	4250	850
385/55R22.5	20	160 J	992	387	12.25	15.5	4500	900

668 ALL POSITION

- Exceptional mileage and resistance to irregular wear.
- Excellent driving stability and durability.
- Suitable for steer and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
315/80R22.5	20	157/154 M	1069	314	9.00	14.5	4125/3750	900

716 STEER / TRAILER

- Wide tread for long life and high speed running.
- Fuel efficient with lower rolling resistance.
- Reduced operational costs.
- Suitable for steer and trailer wheel positions.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
425/65R22.5	18	162 L	1118	430	13.00	16.5	4750	760
425/65R22.5	20	165 K	1118	430	13.00	16.5	5150	830

788 DRIVE

- Suitable tyre for trucks and buses.
- Unique pattern design offers superior resistance to irregular wearing.
- High resistance to cuts and stone damage.
- Suitable for drive wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
12R22.5	18	152/149 M	1089	298	9.00	20.5	3550/3250	930

766 STEER / TRAILER

- Exceptional mileage and resistance to irregular wear.
- Excellent high speed stability and durability.
- Excellent resistance to rib-tearing.
- Suitable for steer and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
12R22.5	18	152/149 M	1078	298	9.00	15.0	3550/3250	930
295/80R22.5	16	152/148 M	1035	298	9.00	15.0	3750/3450	850
	18	154/151 M	1035	298	9.00	15.0	3750/3450	900
315/80R22.5	20	157/154 M	1068	314	9.00	15.0	4125/3750	900

755 DRIVE

- Designed for drive axle trucks and buses.
- Unique tie-bar pattern design offers superior resistance to irregular wearing and block tearing.
- Provides longer tread life and high speed durability.
- High mileage and speed with lower heat build up.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
10.00R20	18	149/146 L	1059	276	7.50	21.5	3250/3000	930
12R22.5	18	152/149 M	1092	298	9.00	20.0	3550/3250	930
295/80R22.5	16	152/148 M	1049	298	9.00	20.0	3550/3150	850
	18	154/151 M	1049	298	9.00	20.0	3750/3450	900
315/80R22.5	20	154/151 M	1076	312	9.00	18.0	3750/3450	900

600 STEER

- Fuel efficient with lower rolling resistance.
- Wide tread for long life and high speed durability.
- Highly resistant to irregular wear.
- Suitable for steer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11R22.5	16	146/143 M	1048	275	8.25	15.0	3000/2725	830
11R24.5	16	149/146 L	1100	275	8.25	15.0	3250/3000	830
285/75R24.5	16	147/144 L	1049	280	8.25	15.0	3075/2800	830
295/75R22.5	16	146/143 L	1010	295	9.00	15.0	3000/2725	830

786 STEER / TRAILER

- Exceptional mileage and resistance to irregular wear.
- Excellent high speed stability and durability.
- Excellent resistance to rib-tearing.
- Suitable for steer and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R22	18	154/151 L	1129	288	8.0	15.0	3750/3450	930
11R22.5	16	146/143 M	1048	268	8.25	15.0	3000/2725	830
12R22.5	18	152/149 M	1078	298	9.00	15.0	3550/3250	930
13R22.5	18	154/151 L	1112/1119	300	9.75	13.0/15.0	3750/3450	830
295/80R22.5	16	152/148 M	1035	298	9.00	15.0	3550/3150	900
	18	154/151 M	1035	298	9.00	15.0	3750/3450	900
315/80R22.5	20	157/154 M	1075	314	9.00	15.0	4125/3750	900

678 TRAILER

- Fuel efficient with lower rolling resistance.
- Wide tread for long life and high speed durability.
- Highly resistant to irregular wear.
- Suitable for steer wheels.




SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11R22.5	14	144/142 M	1038	275	8.25	9.8	2800/2650	720
	16	146/143 M	1038	275	8.25	9.8	3000/2725	830
11R24.5	14	146/143 M	1090	275	8.25	9.8	3000/2725	720
	16	149/146 L	1090	275	8.25	9.8	3250/3000	830
285/75R24.5	14	144/141 M	1039	280	8.25	9.8	2800/2575	760
	16	147/144 L	1039	280	8.25	9.8	3075/2800	830
295/75R22.5	14	144/141 M	1000	295	9.00	9.8	2800/2575	760
	16	146/143 L	1000	295	9.00	9.8	3000/2725	830

785 DRIVE

- High mileage and speed with lower heat build up.
- Unique tie-bar pattern design offers superior resistance to irregular wearing and block tearing.
- Provides longer tread life and high speed durability.
- Suitable for drive axle trucks and buses.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
1100R22	18	154/151 L	1143	288	8.0	22.0	3750/3450	930
11R22.5	16	146/143 M	1062	275	8.25	18.0	3000/2725	830
12R22.5	18	152/149 M	1092	298	9.00	18.0	3550/3250	930
13R22.5	18	154/151 L	1114/1133	300	9.75	14.0/18.0	3750/3450	830
205/75R17.5	14	124/122 M	753	212	6.00	14.5	1600/1500	760
215/75R17.5	14	126/124 M	765	222	6.00	14.5	1700/1600	700
225/75R17.5	16	129/127 M	782	222	6.75	15.5	1850/1750	830
235/75R17.5	16	132/130 M	797	242	6.75	15.5	2000/1900	775
245/70R17.5	16	136/134 M	787	249	7.50	15.5	2240/2120	850
225/70R19.5	14	128/126 M	807	225	6.75	14.5	1800/1700	760
245/70R19.5	16	136/134 M	838	249	7.50	15.5	2240/2120	830
265/70R19.5	16	140/138 M	869	259	7.50	15.5	2500/2360	830
275/70R22.5	18	148/145 M	960	278	8.25	18.5	3150/2900	900
285/70R19.5	16	146/144 M	893	287	8.25	16.5	3000/2800	900
295/80R22.5	16	152/148 M	1049	298	9.00	18.0	3550/3150	850
295/80R22.5	18	154/151 M	1049	298	9.00	18.0	3750/3450	900
315/70R22.5	18	154/150 M	1018	311	9.00	19.0	3750/3350	900
315/80R22.5	20	157/154 M	1082	310	9.00	18.0	4125/3750	900

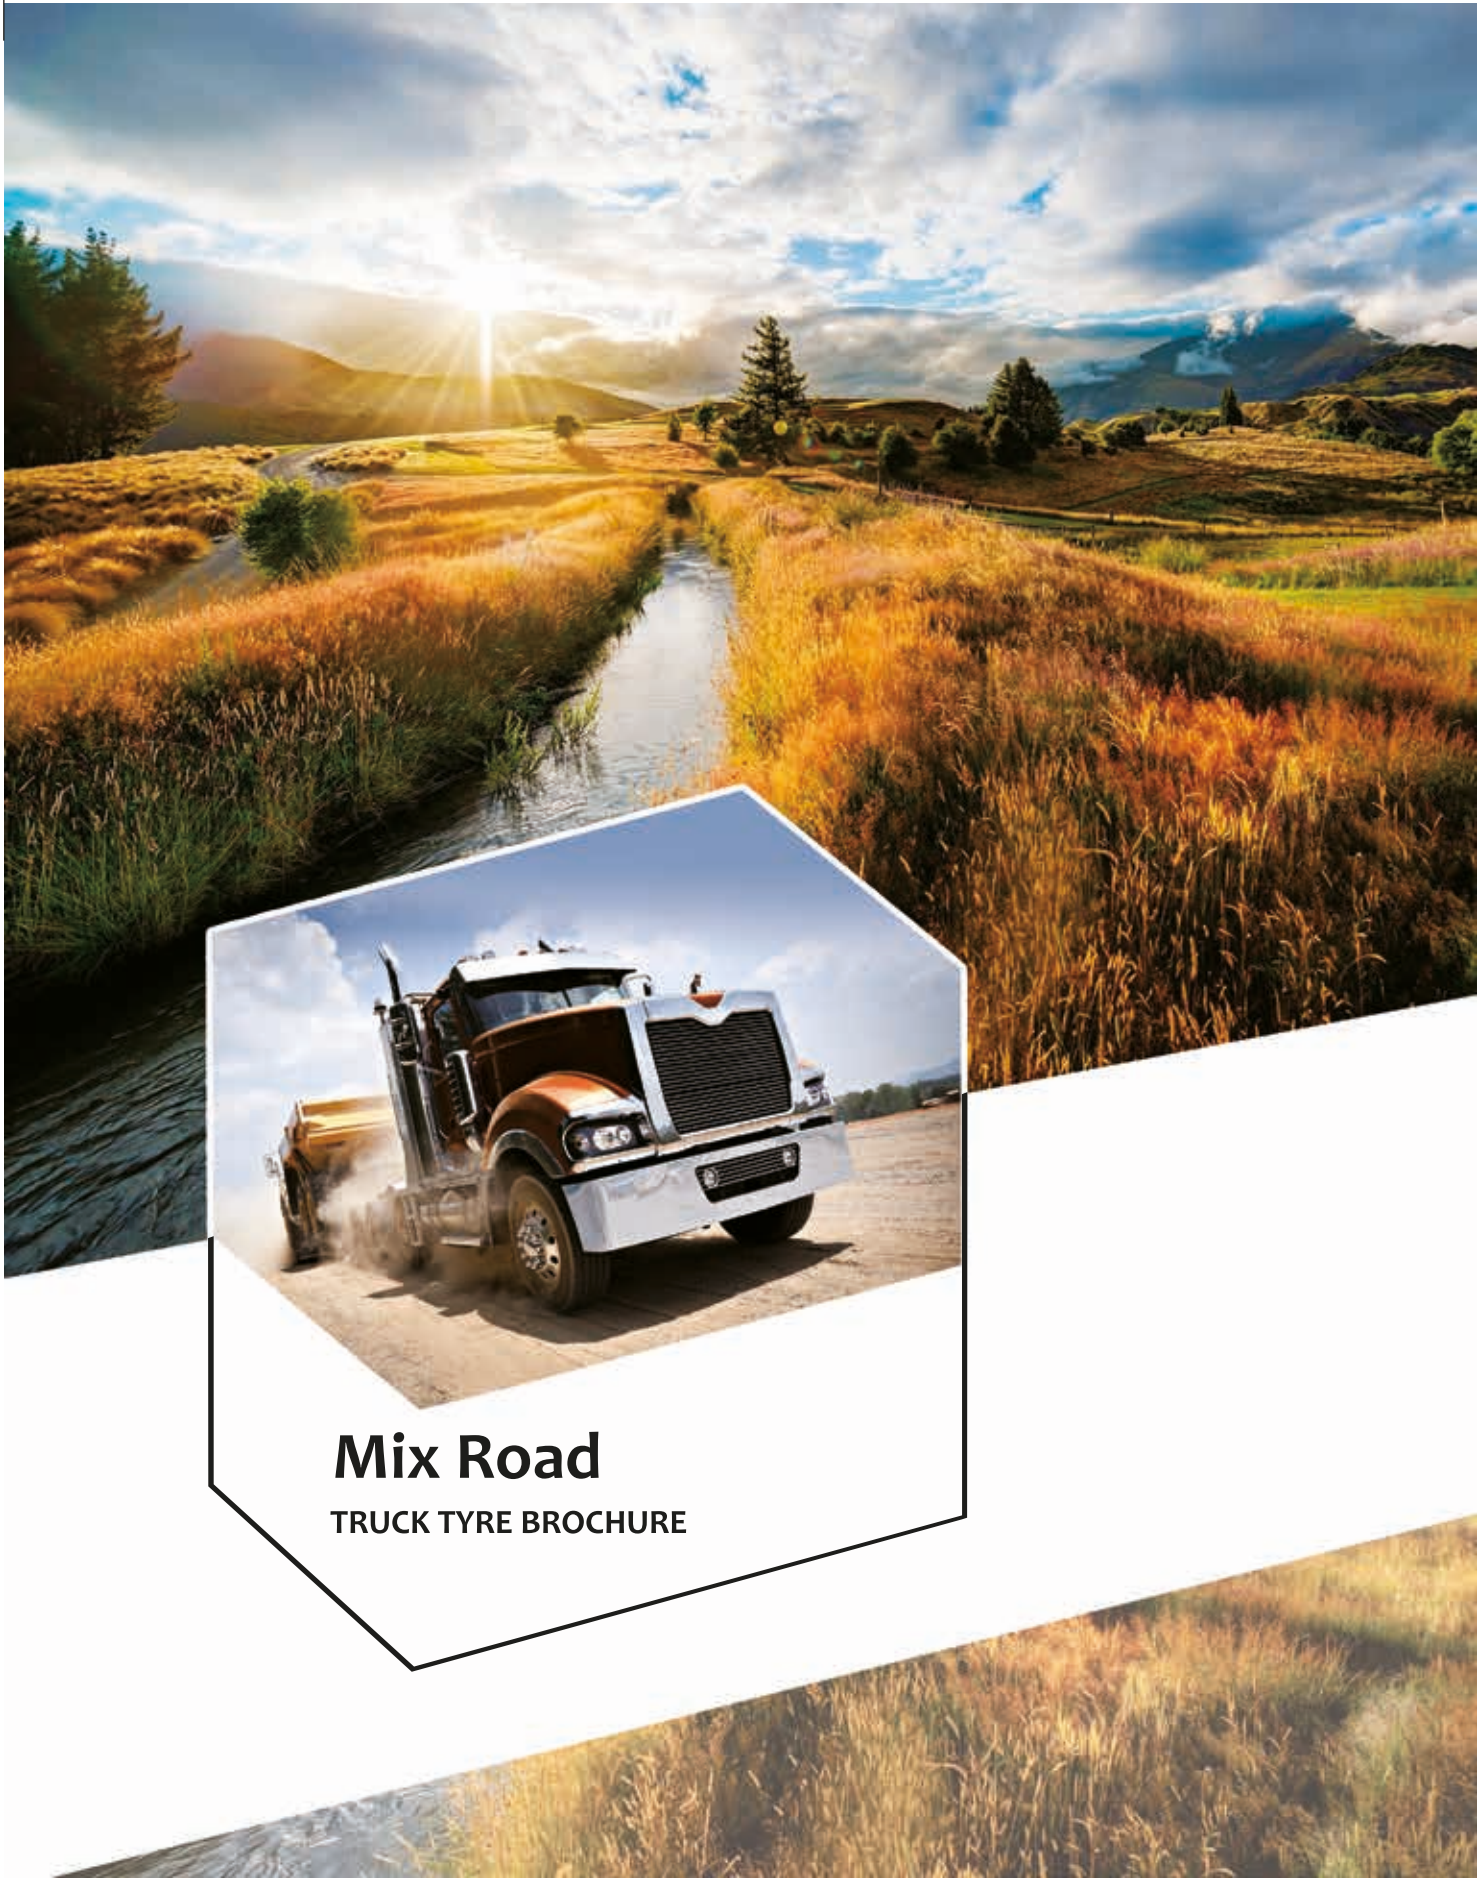

Mix Road

TRUCK TYRE BROCHURE

300 ALL POSITION

- Resistant to cuts and stone retention.
- Wide tread for long life and uniform wear.
- Excellent driving stability, traction and durability.
- All position tyre for city and highway service.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
6.50R16LT	12	110/105 L	749	182	5.50F	10.0	1060/925	670
7.00R16LT	14	118/114 L	775	202	5.50F	13.0	1320/1180	770
7.50R16LT	16	124/120 L	801	220	6.00G	13.0	1600/1400	870
8.25R16LT	16	128/124 M	851	233	6.50H	12.5	1800/1600	770
8.25R20	16	139/137 L	963	233	6.50	14.5	2430/2300	930
9.00R20	16	144/142 L	1018	260	7.00	15.5	2800/2650	900
10.00R20	18	149/146 L	1049	278	7.50	16.5	3250/3000	930
11.00R20	18	152/149 L	1083	290	8.00	17.0	3550/3250	930
12.00R20	18	154/151 L	1119	312	8.50	17.5	3750/3450	830
12.00R24	20	160/157 K	1210	310	8.50	14.5	4500/4125	900
11R22.5	14	144/142 M	1049	275	8.25	15.5	2800/2650	720
	16	146/143 M	1049	275	8.25	15.5	3000/2725	830
12R22.5	18	152/149 M	1082	298	9.00	17.0	3550/3250	930
13R22.5	18	154/151 L	1114/1124	300	9.75	14.5/17.5	3750/3450	830
315/80R22.5	20	157/154 M	1072	310	9.00	17.0	4125/3750	900

301 ALL POSITION

- Wide tread is resistant to stone retention.
- Deep tread for extra-long life and good wet traction.
- Combines durability in mild off road and long life on-road with good traction.
- Suitable for all wheels position.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 L	1081	290	8.0	14.5	3550/3250	930

303 ALL POSITION

- Resistant to cuts and stone retention.
- Wide tread for long life and uniform wear.
- Excellent driving stability,traction and durability.
- All position tyres for city and highway service.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
12.00R24	20	160/157 K	1210	310	8.5	14.5	4500/4125	900

302 DRIVE

- Resistance to irregular wear.
- High level of traction for on and off road.
- Wide tread is resistant to stone retention.
- Suitable for drive and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
10.00R20	18	149/146 L	1058	278	7.5	19.5	3250/3000	930
11.00R20	18	152/149 L	1086	290	8.0	17.0	3550/3250	930
12.00R20	18	154/151 L	1128	310	8.5	17.0	3750/3450	830
12R22.5	18	152/149 M	1082	298	9.00	17.0	3550/3250	930

306 DRIVE

- High traction and cut resistant.
- Suitable for drive wheels on logging, construction and mining vehicles.
- Good self cleaning properties.
- Durability on rough surfaces.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
8.25R16LT	16	128/124 M	851	233	6.50H	13.0	1800/1600	770
10.00R20	18	149/146 L	1054	278	7.5	17.5	3250/3000	930
11.00R20	18	152/149 L	1088	298	8.0	18.0	3550/3250	930
12.00R20	18	154/151 L	1124	312	8.5	18.5	3750/3450	830

307 ALL POSITION

- Wide tread enables long wear life and stone retention resistance.
- Deep tread for extra-long life and good wet traction.
- Combines durability in mild off road and long life on-road with good anti-sideslip.
- Suitable for all wheels position.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 L	1083	290	8.0	17.5	3550/3250	930
12.00R20	18	154/151 L	1119	312	8.5	18.0	3750/3450	830

308 DRIVE

- Wide deep tread pattern allows for a long wear life.
- High level of traction for on and off road.
- Cut resistant with good self cleaning properties.
- Suitable for drive wheel.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
9.00R20	16	144/142 K	1021	260	7.0	17.0	2800/2650	900
10.00R20	18	149/146 K	1054	278	7.5	18.0	3250/3000	930

358 DRIVE

- Resistance to irregular wear.
- High level of traction for on and off road.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Suitable for drive and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 K	1091	290	8.0	18.5	3550/3250	930
12.00R20	18	154/151 K	1127	312	8.5	20.0	3750/3450	830

386 DRIVE

- Resistance to irregular wear.
- High level of traction for on and off road.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Suitable for drive and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
7.00R16LT	14	118/114 K	780	202	5.50F	15.0	1320/1180	770
7.50R16LT	14	122/118 K	806	220	6.00G	15.0	1500/1320	770
7.50R16LT	16	124/120 K	806	220	6.00G	15.0	1600/1400	870
8.25R16LT	16	128/124 K	860	233	6.50H	15.5	1800/1600	770
8.25R20	16	139/137 K	970	233	6.5	16.5	2430/2300	930
9.00R20	16	144/142 K	1026	260	7.0	18.5	2800/2650	900
10.00R20	18	149/146 K	1055	278	7.5	19.5	3250/3000	930
11.00R20	18	152/149 K	1095	290	8.0	20.5	3550/3250	930
12.00R20	18	154/151 K	1130	312	8.5	21.5	3750/3450	830

378 DRIVE

- Suitable for steer and drive wheel fitment.
- Suitable for both on and off road applications.
- Super level of traction.
- Resistant to cuts and stone retention.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 K	1094	290	8.0	20.0	3550/3250	930
12.00R20	18	154/151 K	1130	312	8.5	21.5	3750/3450	830

388 DRIVE

- Wide deep tread pattern allows for a long wear life.
- High level of traction for on and off road.
- Cut resistant with good self cleaning properties.
- Suitable for drive wheel.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
10.00R20	18	149/146 K	1052	278	7.5	18.0	3250/3000	930
11.00R20	18	152/149 J	1092	290	8.0	19.0	3550/3250	930
12.00R20	18	154/151 K	1128	312	8.5	20.5	3750/3450	830

767 DRIVE

- Resistance to irregular wear.
- High level of traction for on and off road.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Suitable for drive wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
12R22.5	18	152/149 L	1085	305	9.00	21.0	3550/3250	930

607 DRIVE

- Cut resistant with good self-cleaning properties.
- Resistance to irregular wear.
- Very popular fitment for drive wheel.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11R22.5	14	144/142 M	1057	275	8.25	19.5	2800/2650	720
11R22.5	16	146/143 L	1057	275	8.25	19.5	3000/2725	830
11R24.5	14	146/143 M	1109	275	8.25	19.5	3000/2725	720
11R24.5	16	149/146 L	1109	275	8.25	19.5	3250/3000	830

617 DRIVE

- Wide deep tread pattern allows for a long wear life.
- Excellent performance for driving and braking.
- New tread design giving excellent traction and cut resistance.
- Very popular fitment for drive wheel.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11R22.5	14	144/142 M	1064	275	8.25	23.0	2800/2650	720
11R22.5	16	146/143 L	1064	275	8.25	23.0	3000/2725	830
11R24.5	14	146/143 M	1116	275	8.25	23.0	3000/2725	720
11R24.5	16	149/146 L	1116	275	8.25	23.0	3250/3000	830

660 DRIVE

- All position tyre suitable for both on and off road applications.
- Cut resistant tread compound.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Stone ejectors in the tread prevents stone retention which can lead to casing damage.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11R22.5	16	146/143 M	1063	275	8.25	22.5	3000/2725	830
11R24.5	16	149/146 L	1115	275	8.25	22.5	3250/3000	830
285/75R24.5	16	147/144 L	1064	280	8.25	22.5	3075/2800	830
295/75R22.5	16	146/143 L	1025	295	9.00	22.5	3000/2725	830

700 DRIVE

- Stone ejectors in the tread prevents stone retention which can lead to casing damage.
- New tread design giving excellent traction and cut resistance.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Suitable for both drive and trailer fitment.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
10.00R20	18	149/146 K	1054	278	7.5	18.0	3250/3000	930
13R22.5	18	154/151 K	1114/1131	300	9.75	14.0/21.0	3750/3450	830
315/80R22.5	18	154/151 K	1078	314	9.00	20.0	3750/3450	830
12R22.5	18	152/149 K	1088	298	9.00	20.0	3550/3250	930
295/80R22.5	18	154/151 K	1045	298	9.00	19.0	3750/3450	900
315/80R22.5	20	157/154 K	1076	312	9.00	20.0	4125/3750	850

787 ALL POSITION

- Wide tread enables long wear life and stone retention resistance.
- Deep tread for extra-long life and good wet traction.
- Combines durability in mild off road and long life on-road with good traction.
- Suitable for all wheel positions.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
12.00R24	20	160/157 K	1210	313	8.5	14.5	4500/4125	900

886 ALL POSITION

- Wide tread enables long wear life and stone retention resistance.
- Deep tread for extra-long life and good wet traction.
- Combines durability in mild off road and long life on-road with good traction.
- Suitable for all wheels position.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
12R22.5	18	152/149 M	1080	298	8.25	16.0	3550/3250	930



On / Off Road
TRUCK TYRE BROCHURE

309 ALL POSITION

- All terrain tyres suitable for all position fitment.
- Super level of traction.
- Resistant to cuts and stone retention.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
10.00R20	18	149/146 J	1060	278	7.5	20.5	3250/3000	930
11.00R20	18	152/149 J	1094	290	8.0	21.0	3550/3250	930
12.00R20	18	154/151 J	1130	310	8.5	21.5	3750/3450	830
12.00R24	20	160/157 K	1230	316	8.5	21.0	4500/4125	900

369 ALL POSITION

- Wide tread enables long wear life with stability and durability.
- Deep tread for extra-long life and excellent traction.
- Cut resistance with good self cleaning properties in harsh conditions.
- Suitable for all wheel position on mining vehicles.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 D	1100	290	8.0	24.0	3550/3250	930
12.00R20	18	154/151 D	1127	312	8.5	24.0	3750/3450	830

379 ALL POSITION

- Wide tread enables long wear life with stability and durability.
- Deep tread for extra-long life and excellent traction.
- Cut resistance with good self cleaning properties in harsh conditions.
- Suitable for all wheel position on mining vehicles.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
8.25R20	16	139/137 D	973	233	6.5	18.0	2430/2300	930
11.00R20	18	152/149 D	1100	290	8.0	23.0	3550/3250	930
12.00R20	18	154/151 D	1135	312	8.5	24.0	3750/3450	830
8.25R16LT	16	128/124 D	865	233	6.50H	18.0	1800/1600	770

389 DRIVE

- Resistant to cuts and stone retention.
- High level of traction for off road applications.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Suitable for drive wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
7.00R16LT	14	118/114 D	782	202	5.50F	16.0	1320/1180	770
7.50R16LT	16	124/120 D	808	220	6.00G	16.0	1600/1400	870
8.25R16LT	16	128/124 D	865	233	6.50H	18.0	1800/1600	770
9.00R20	16	144/142D	1028	260	7.0	19.5	2800/2650	900
10.00R20	18	149/146 D	1060	278	7.5	22.0	3250/3000	930
11.00R20	18	152/149 D	1100	290	8.0	23.0	3550/3250	930
12.00R20	18	154/151 D	1135	312	8.5	24.0	3750/3450	830

399 DRIVE

- Resistant to cuts and stone retention.
- High level of traction for off road.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Suitable for drive wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
10.00R20	18	149/146 D	1076	278	7.5	26.0	3250/3000	930
11.00R20	18	152/149 D	1104	290	8.0	26.0	3550/3250	930
12.00R20	18	154/151 D	1140	312	8.5	26.0	3750/3450	830